

How to Impose a booklet

GX Print Server for B9 Series Copier/Printer

Version 2.1

FUJIFILM Business Innovation Corp.

Overview

This exercise will demonstrate the ability to produce an imposed booklet using the GX Print Server "Imposer" tool. This feature allows users to produce saddle stitched jobs and preview an onscreen example before the file is submitted to print.

Objective


By the end of this exercise you will be able to:

- Import a job
- Launch Imposer
- Create a imposed Saddle Stitch layout
- Preview an example of the printed result
- Print the job with saddle stitch settings applied







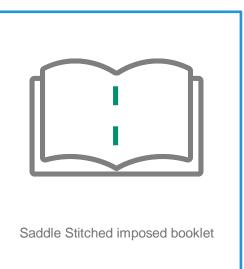

Impose Booklet

1. In the shortcut area, select [Import Jobs].



2. Select the file to import, and click [OK]

Import Jobs					🗂 × 🗂
Select File					Select Folder
Print Server v	Name	Туре	Size	Last Modified Da	Thefault
:/Users	booklet_A_ol.pdf	PDF	23,640 KB	2017/08/21 9:46:0	Job Properties
defaultuser0 P-Server					Template
Contacts					template_default v
✓ Desktop					C Logical Printer
					JSO : JDF V
					Operation After Importing
					Hold
					RIP and Hold
					O Print
					Restore State When Job Is Saved
					Operation After Printing
• • •	٩			•	Retain Jobs
File Name booklet_A_ol.pdf					Retain Raster
File Type Importable Files (*.jbf;*.bbf;*.a	tip;*.ps;*.pdf;*.eps;*.tif;*.jpg)				
					Cancel
N					


3. Right click the imported job, select [Job Director] and click [Imposer].

= FUJI XeroX 🕱					GX Print Server			Adminis	trator (Administrator)	. 🖓	= • •	
✓ Print Server : Printer Ready			5	5 3: AA0120008 Tray 2 Out of Pape								
B9136 Copier/Print	er											
▲ Printer Ready			ŝ	5 6 Print Resume Printing	7 Ctrl+P	1 2	>	ĸ				٩
Job Manager	+ 10	nport Jobs Held: 2	Imposition 1	Promote Proof Print Print Now RIP and Hold	Ctrl+T	Job Templa	des 🙍	Job History	Widgets	> Job		• ••
All Jobs Recent Jobs	74	101	Name raw_3562_0_FP026: raw_3562_0_FP026: A4P_2_A3L_2withM	Delete Delete RIP Data Duplicate	Delete Ctrl+D	Attributi	Status Held Held	ID N	lame Attributes S	Input	Output	
Enter a Job Name	٩	133 208	A4P_2_A3L_2_Spcii raw_25455_1_A4.pd	Maya To		mposer sequencer	Ctri-	2				
ogical Printer 20180525-102714	0 (215	DC1100 Tab Master APEX CERT.jpg DC1100 Tab Master	Raster Image Viewer	Ctrl+R	Create Combined					49186	
Folder #Default	74	226 227	raw_25455_1_A4.pd raw_25455_1_A4.pd raw_25455_1_A4.pd	Job Estimation Save Job Job Transfer	,	RP RP RP	Suspender Suspender Suspender	Error 11	Completed: 43		- And	
Tag AND OR	۲	233	raw_25455_1_A4.pd User_guide_En_ME8 Chinese Language R	Save Job Information for A eform Crisis_OK_NEW_50.			Suspender Suspender Suspender	ID T	Name raw_3562_0_FP02631.PD	<u> </u>	1 / 1133	K
Mo Too =	-	236 240	Chinese Language R First Aid Handbook N			xdf	Suspender Suspender Suspender	150 151	:119:Test Page Arm layout 29April2018_P: Arm layout 29April2018_P:		233 User guid	0
٩		246	raw_3562_0_FP0263	31.PDF			Suspender	202	2018_0424_144420.pdf	Copies	1	1.


 (\mathbf{i})


In the next window, please ensure the [Page Number Display] button is selected instead of [Thumbnail Display]. So that the preview images will be shown as in this example.

4. Select [Saddle Stitch] in the [Bind Method] tab

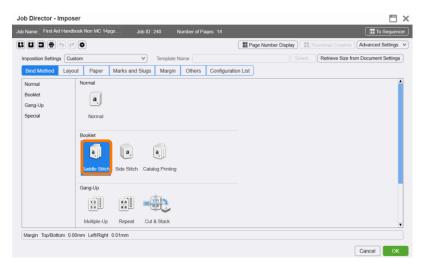


- 5. Click the [Paper] tab and apply the following settings.
 - a. [A3] in [Output Sheet Size] of [OutputSheet Settings]
 - b. [Landscape] in [Layout] of [OutputSheet Settings]
 - c. [A4] in [Finish Size] of [Finishing Settings]
 - d. [Portrait] in [Orientation] of [Finished Settings]

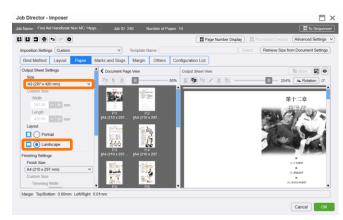


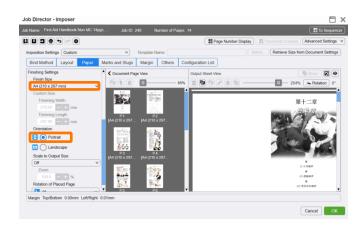


6. Click the [Preview Finish] icon to view an example of the printed result

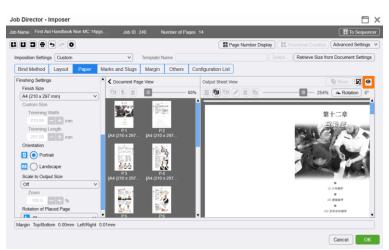


7. Click [Close].

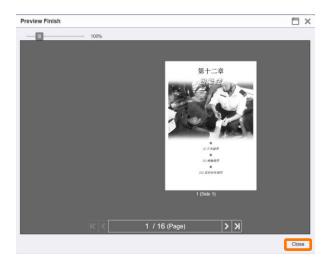

8. Click [OK].

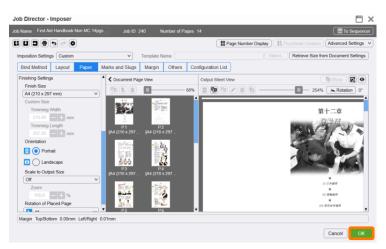

- 9. Double-click the job to open the Job Properties window.
- Click the [Output] > [Stapling/Hole Punch/Folding] and the select [Saddle Stitch] in the [Stapling] drop down menu.

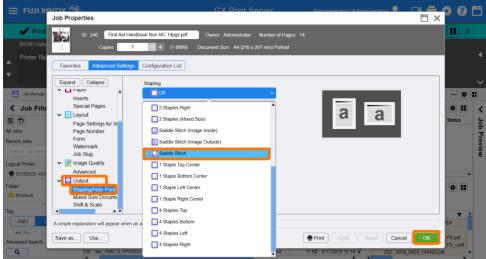



Please ensure that all other properties such as the specific paper settings are correct before submitting the job to the processing queue.

11. Click [OK]. Right click the job and select [Print].

Congratulations you have now completed this exercise.