

How to Apply Auto Correct Photo Image Quality

GP Controller for ApeosPro
C810/C750/C650

Version 1.0


Overview

This exercise will demonstrate the ability to automatically enhance photographic images using the GP Controller. This feature can be used to apply improvements such as color correction and sharpness to images. It can be used to enhance output quality without specialized graphic reproduction knowledge being required from the operator.

Objective

By the end of this exercise users will be able to:

- Navigate to the location of the setting on the GP Controller
- Make an adjustment to the default value
- Compare the results

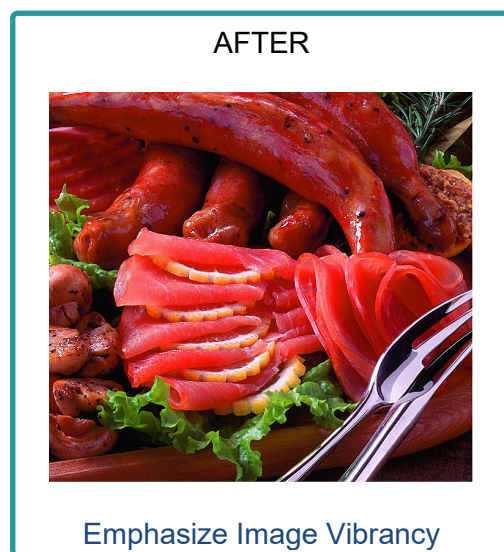


Auto Correct Photo Image Quality


Print a sample file with the default setting before making the following adjustment.



1. In the shortcut area, select **Import Jobs**.

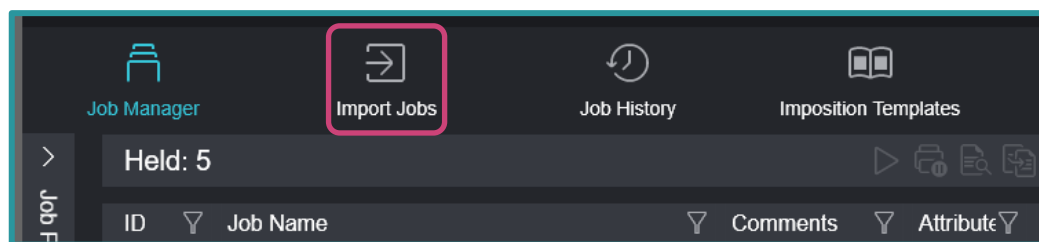


2. Select sample jobs to import.
3. Select **Hold Jobs** in Operation After Importing and **template_default** in Template and then click **OK**.

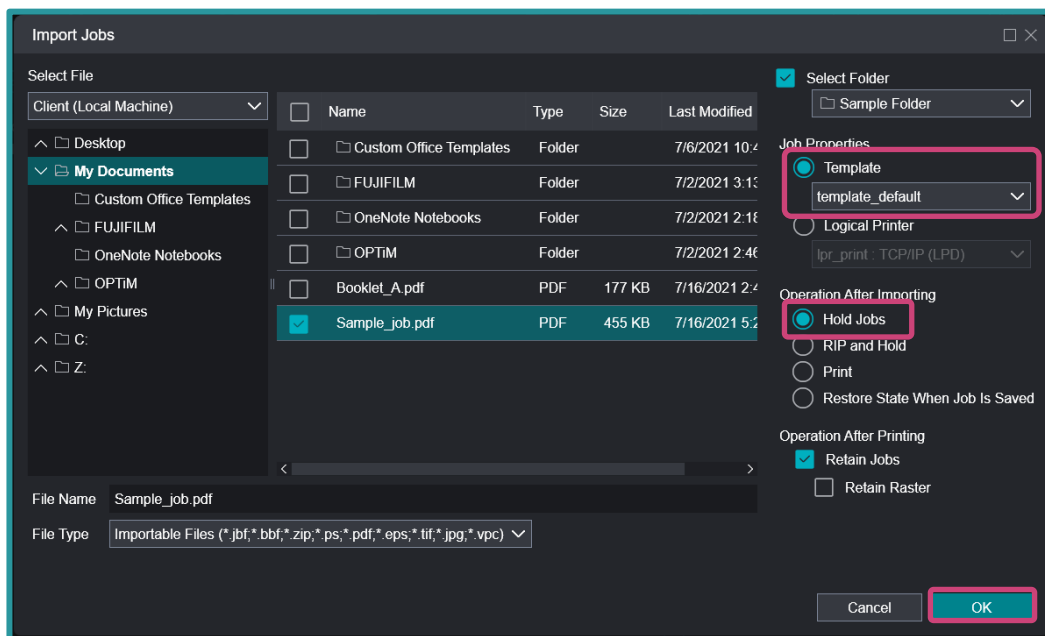


4. Double-click the imported job to display the job properties.


5. Select the [Job Settings > Color > RGB(Photo)].

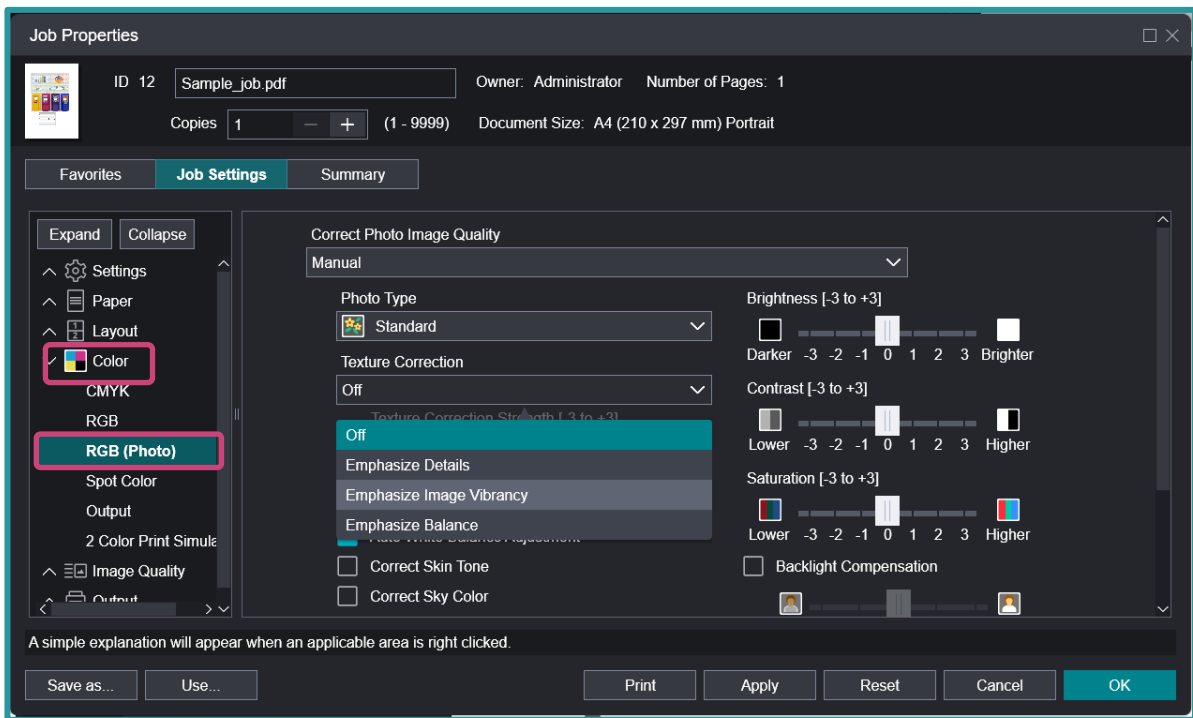

6. Select **Manual** in Correct Photo Image Quality and select **Emphasize Image Vibrancy** in Texture Correction.

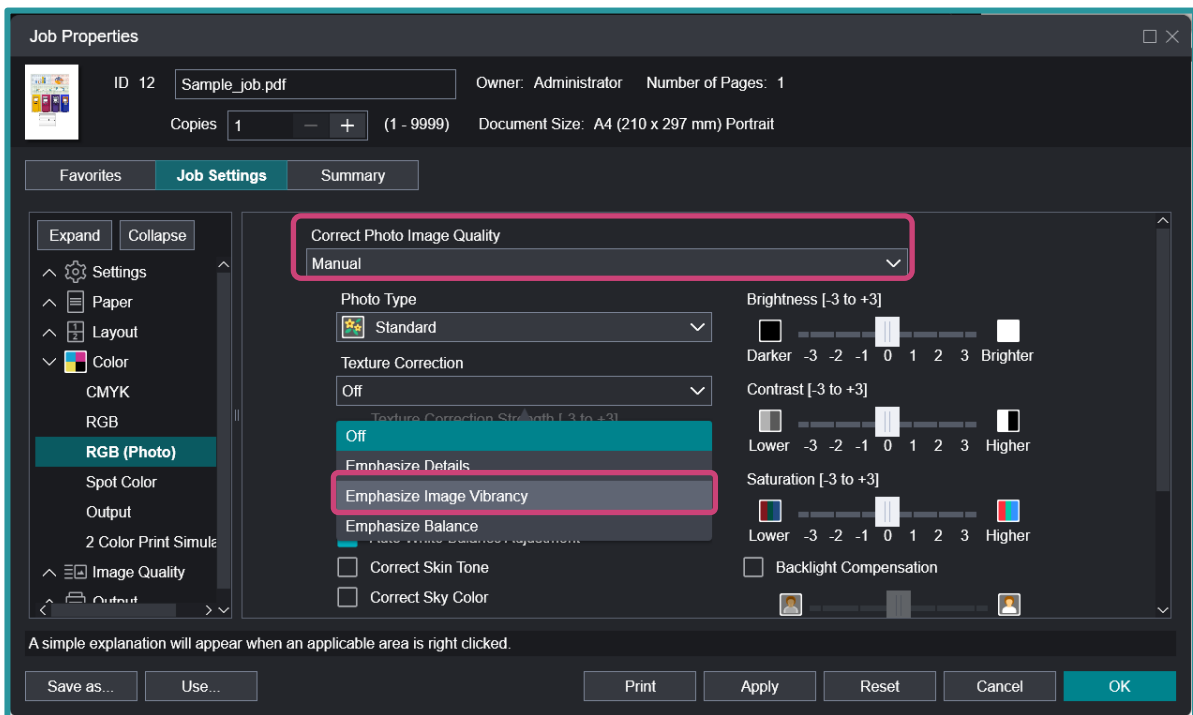

7. Click **Print**.

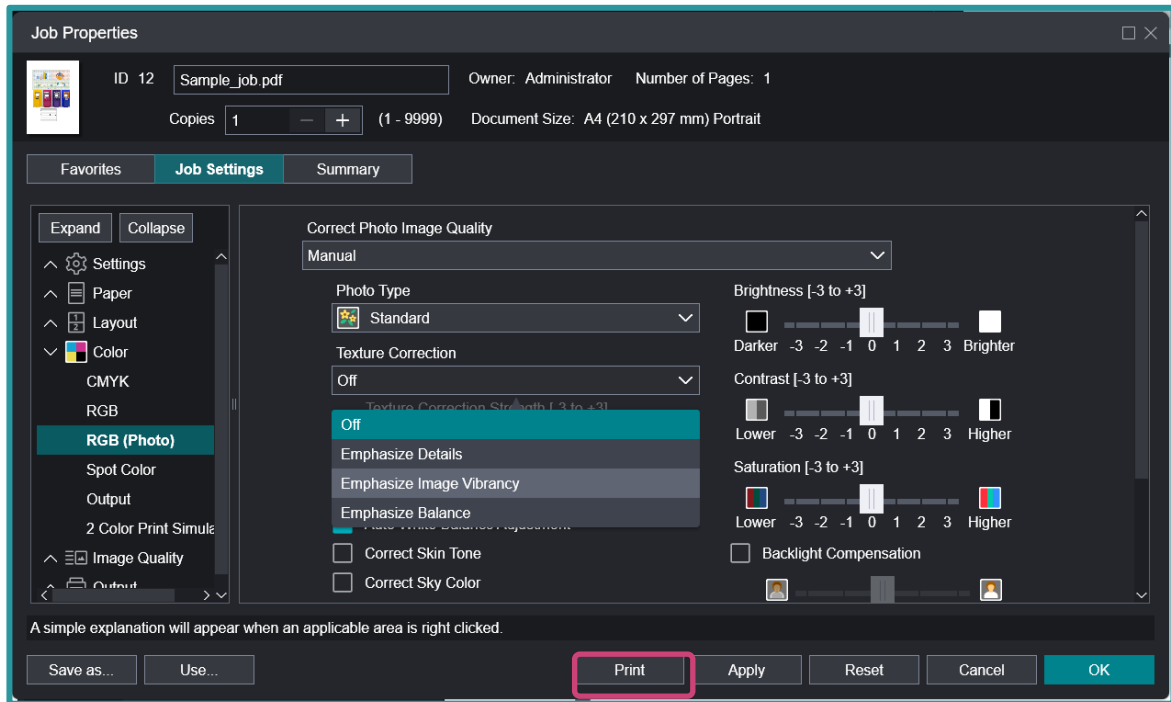

Review the results of your print sample. You may also change a combination of the other settings such as Photo Type and Saturation to improve the overall color result.



Congratulations you have now completed this exercise.

FUJIFILM

For more information, visit us at

FUJIFILM Business Innovation Asia Pacific Pte. Ltd

support-fb.fujifilm.com

FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation